


COMPRESSION CABLE LUGS, WITH TWO HOLES

MATERIAL : E-COPPER

FINISH : ELECTRO-TINNED

FEATURES : WITH / WITHOUT INSPECTION HOLE

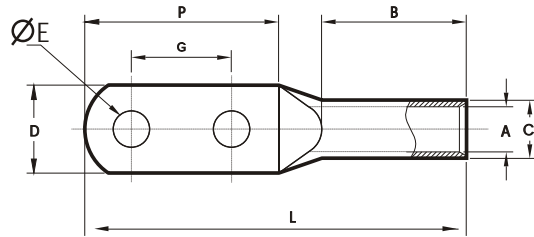

CABLE mm ²	ØE	CATNO.	DIMENSIONS IN mm							PER BOX
			A	C	D	G	P	B	L	
16	10.5	SC2E16-10	5.4	7.1	15	40	64	15	84	40
25	10.5	SC-2E25-10	6.8	8.8	18	40	64	15	87	35
35	10.5	SC-2E35-10	8.2	10.6	18	40	66	17	90	30
50	10.5	SC-2E50-12	9.5	12.4	22.5	40	66	27.5	102	25
70	13	SC-2E70-12	11.2	14.7	24	40	67	30	107	20
95	13	SC-2E95-12	13.5	17.4	26	40	67	33	111	20
120	13	SC-2E120-12	15	19.4	28	40	70	36	118	20
150	13	SC-2E150-12	16.5	21.2	31	40	72	44	130	15
185	13	SC-2E185-12	18.5	23.5	35	40	76	55	149	10
240	13	SC-2E240-12	21	26.5	38	40	78	55	150	10
300	13	SC-2E300-12	23.5	30	42	40	78	55	160	5


COMPRESSION CABLE LUGS FOR TRANSFORMER

DIMENSION 'G' AS PER REQUIREMENT ALSO AVAILABLE

MATERIAL : E-COPPER

FINISH : ELECTRO-TINNED

FEATURES : WITH / WITHOUT INSPECTION HOLE

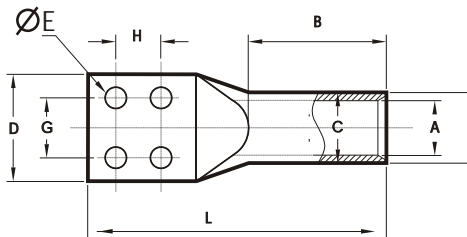

CABLE mm ²	ØE	CAT. NO.	DIMENSIONS IN mm							PER BOX
			A	C	D	G	H	B	L	
240	8.5	SCTR240-4E8	21	28	58	35	25	45	110	10
	10.5	SCTR240-4E10								
300	8.5	SCTR300-4E8	23.5	31	58	35	25	50	115	10
	10.5	SCTR300-4E10								
400	8.5	SCTR400-4E8	27	36.5	58	35	25	52	120	5
	10.5	SCTR400-4E10								
500	8.5	SCTR500-4E8	30	39	58	35	25	56	124	5
	10.5	SCTR500-4E10								
630N	8.5	SCTR630-4E8	34	42	60	35	25	70	145	5
	10.5	SCTR630-4E10								
630	8.5	SCTR630-4E8	34	44	65	35	25	66	145	5
	10.5	SCTR630-4E10								
800	8.5	SCTR800-4E8	39	50.6	73	35	25	90	170	1
	10.5	SCTR800-4E10								
1000	8.5	SCTR1000-4E8	43	56.2	81	35	25	100	200	1
	10.5	SCTR1000-4E10								

